

KÖCKERLING

Rebell classic T



Rebell Classic T


Disc Cultivator

With the introduction of the REBELL classic T, provides an extremely compact modern disc machine for shallow to medium depth tillage work. With its simple design and rugged build quality insures the machine will last the test of time. with the now familiar double STS roller integrated into the machine along with a host of many other features, ensures excellent results are always achieved regardless of the conditions.

With a working depth of 2-14cm the REBELL Classic T is a truly versatile machine capable of carrying out most of the primary/ secondary cultivations, at the minimal of operating costs.

Features such as the Lockpin system, sealed non grease bearings, and strong leaf spring disc elements, means the machine will provide a long working life at minimal expense.



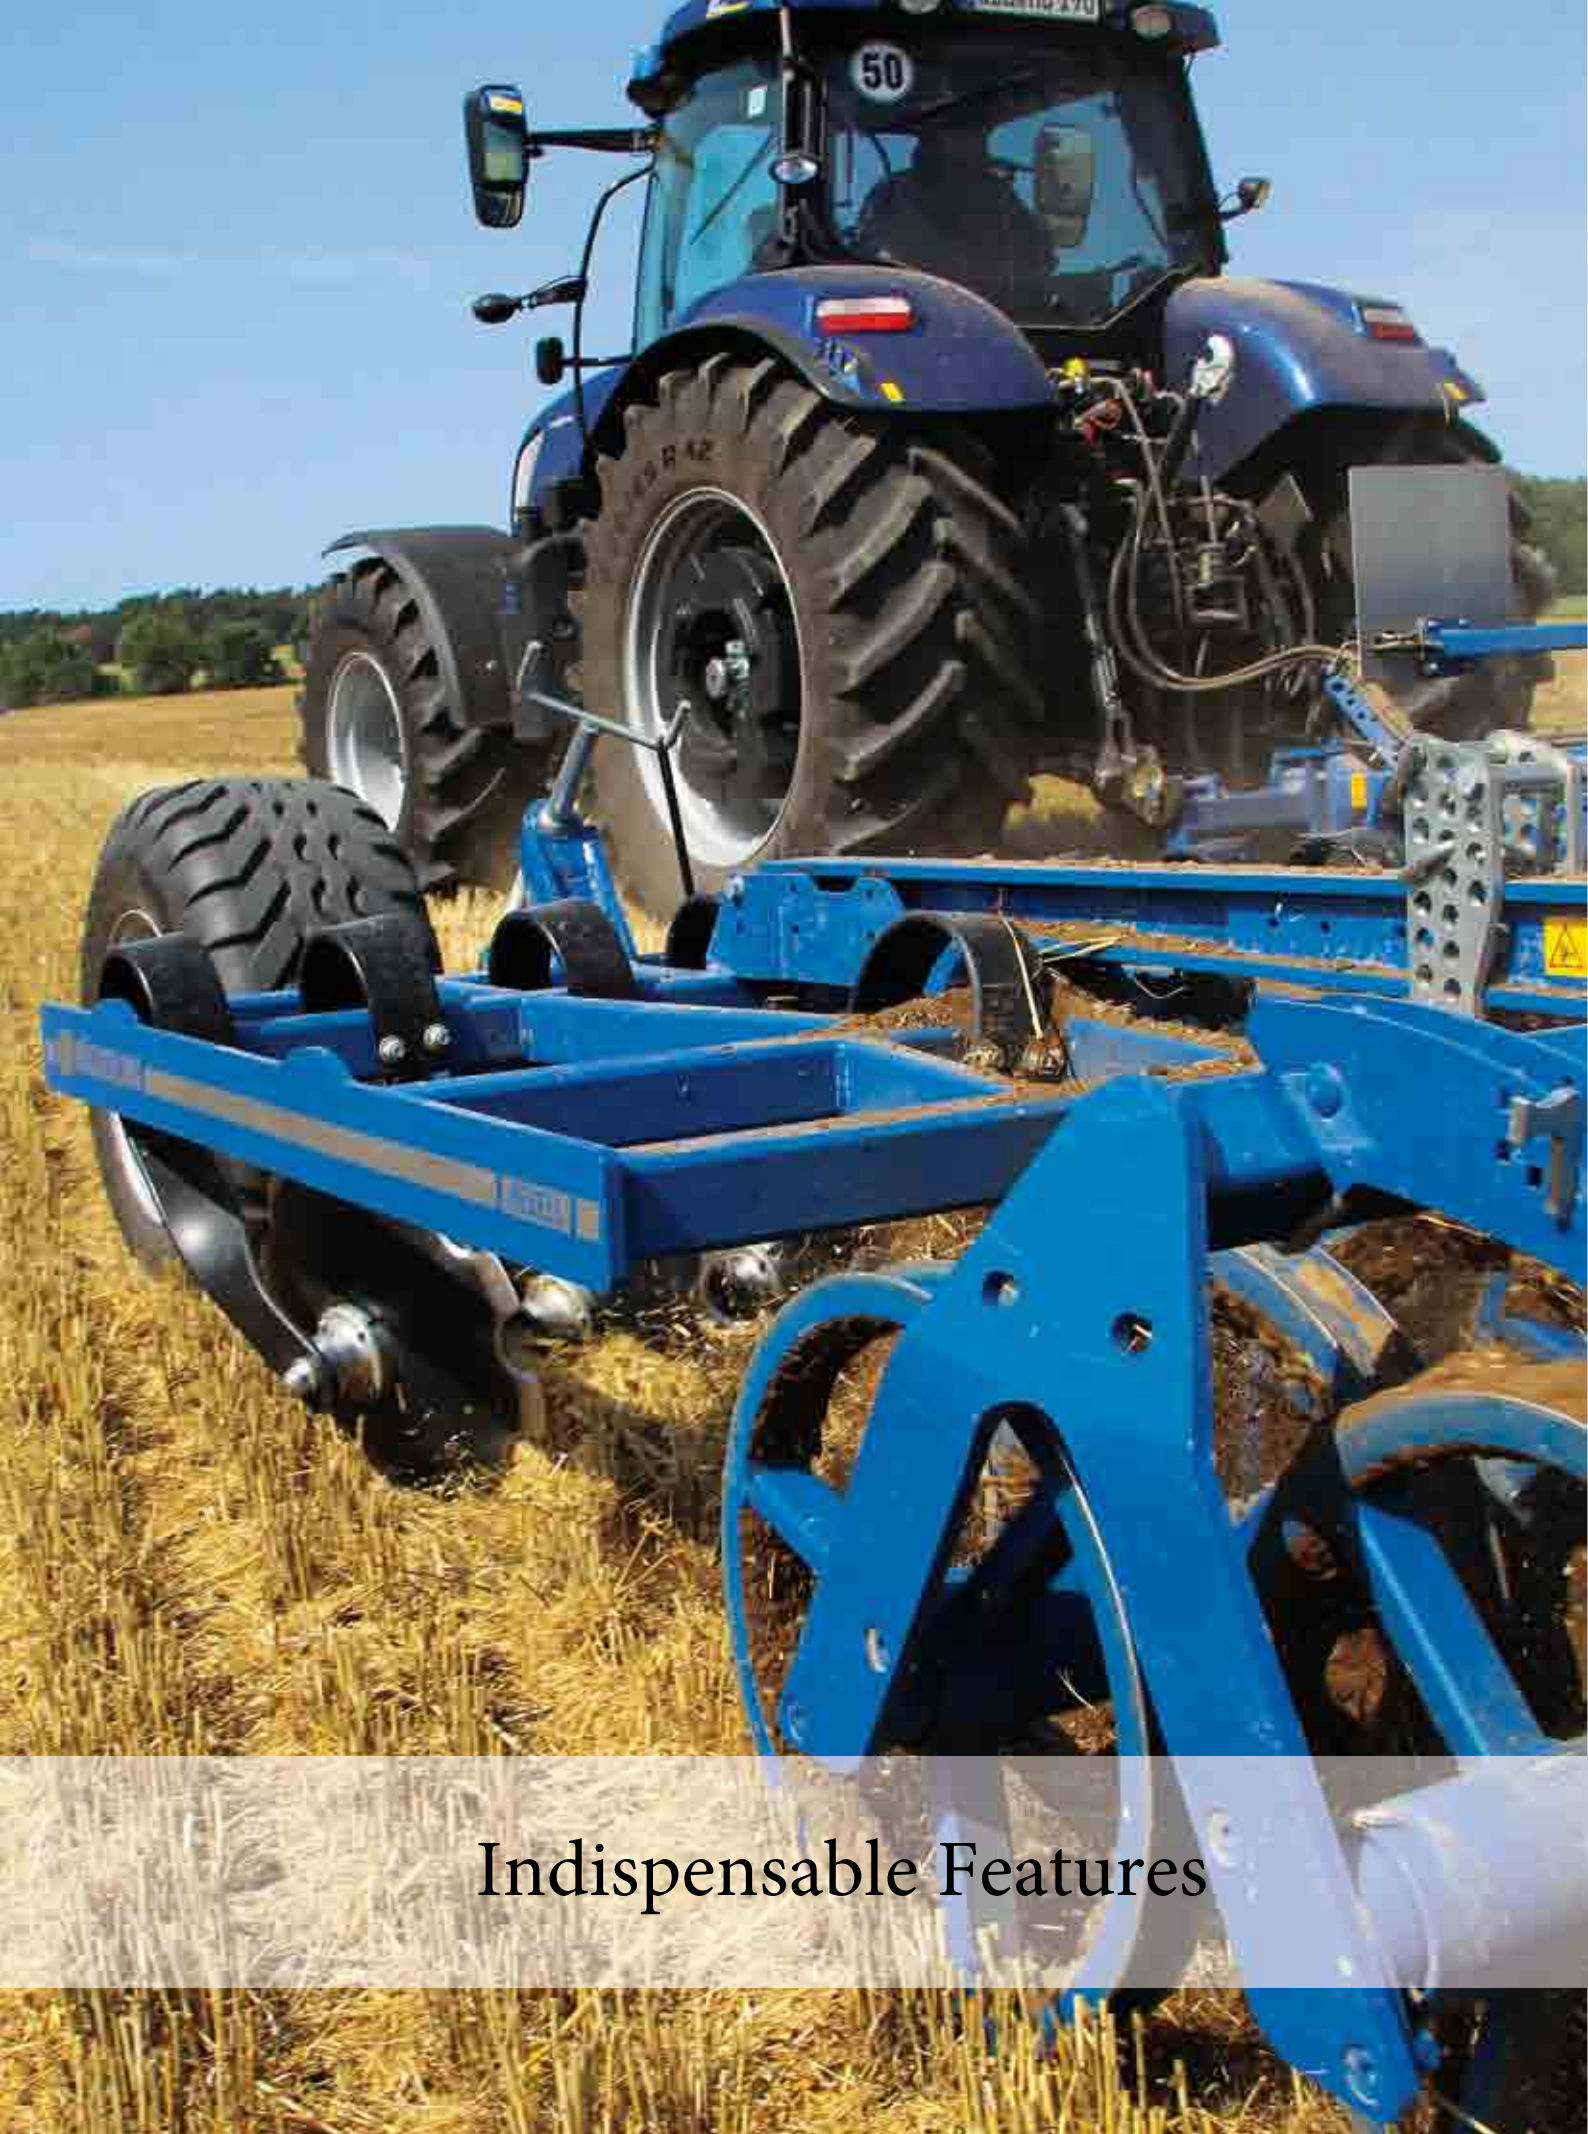

Indispensable Features



520MM Double STS Roller

Using the familiar Double STS roller insures not only are you going to get the most level consolidated finish possible, but also, long working life with minimal wear. The U shaped profile of the ring which fills with soil ensures soil to soil contact keeping the roller turning in all conditions.



Stable Discs

Mounted on individual springs are the 510mm toothed disc, ensure penetration even in the hardest of conditions, with spacing of 130mm ensures all the ground is worked even if working shallow to get a chit. The Disc are bolted on to the springs and using triple sealed and grease free double row tapered roller bearings, means maintenance time is kept to a minimum, maximizing working time in the field .



Simple Depth Adjustment

Using the front depth wheels with marked adjustable turnbuckles and the rear roller arms adjustment plates, means depth control is kept simple and is quick to change.

As an option the machine can also be specified with Kockerlings Easy Shift depth control making it full hydraulically adjustable from the cab.



Low Maintenance

All pivot points on the machine use the Lockpin system extending the machines working life by up to 30%. with the Hot drawn welded box section means quality of the highest standard maximizing the machines working life. and standing up to the constant vibrations involved in the cultivating process.

Rebell classic T

Technical Data

Working Width	5,00 m	6,00 m	8,00 m
Number Of Discs	42	50	62
Disc Diameter	510 mm	510 mm	510 mm
Disc Spacing	130 mm	130 mm	130 mm
Disc Angle	16°	16°	16°
Leaf Spring Angle	16°	16°	16°
Machine Weight	5.060 kg	5.410 kg	6.300 kg
Depth Wheel Size	380/55-17	380/55-17	380/55-17
Transport Wheel SIZE	500/50-17	500/50-17	500/50-17
Max Transport Speed	40 km/h	40 km/h	40 km/h

IMPORTANT Mounting Technology „LockPin“



At every major pivot and fastening points a Lockpin is used
 The Principle
 An axle replaces conventional pins, on the tapered end of the axle a quality cone is inserted. by means of a screw the sleeves and axles are locked in the frame.

Advantages Lockpin ensures a firm connection at pivot points

- No deformation of slots
- No wear and tear on machine
- Attachment is fixed on both sides
- 30% increase in machine life



Levelboard

Machine comes with an adjustable levelboard that sits in front of the roller with the sweeps fitting in between the first set of rings, this spreads the soil and trash out evenly meaning the roller can leave the best finish possible. as well as being the first stage of the leveling process.



Adjustable Following Harrow

The machine can be equipped with a 13mm following harrow tine, which helps to spread out trash evenly, across the working width. The aggressiveness can be adjusted to the desired finish that the operator wants. with the harrow fully down leaves a very level finish ideal for seedbed preparation, or lifted fully will leave a finish that is more ridgy allowing for good weathering of the soil.



Quality is important to us



1118 Rebell classic T 1115 DE
KÖCKERLING behält sich technische Änderungen, die der Weiterentwicklung dienen, vor.

Your Importer

Samagri Ltd
The Well House 4 Stable Court
Herriard Basingstoke
Hampshire RG25 2PL
WWW.SAMAGRI.CO.UK
Tel 01256 384208



DE



G GB



F



P PL



RUS



CZ